



SWEEPERS - RIDER

1404

The 1404 Sweeper features a wide range of standard accessories. With a choice of 3 different brushing methods, the 1404 Sweeper is equipped to tackle any cleaning challenge thrown at it.

MOST FREQUENT USE

RETAIL



HOSPITALITY



CLEANING CONTRACTORS



EDUCATION



MAX PRODUCTIVITY

82,000 ft²/h

BATTERY RUN TIME

2.0-4.7 h

KEY SPECS

58" cleaning path
40 gal capacity



FOLDABLE HANDLE



CARPET KIT



EASY TO USE CONTROLS




INNOVATIONS





SLS™
SELF-LEVELLING
SYSTEM

SLS™ System can be electric or mechanical and allows great cleaning performances thanks to a constant pressure on the floor.

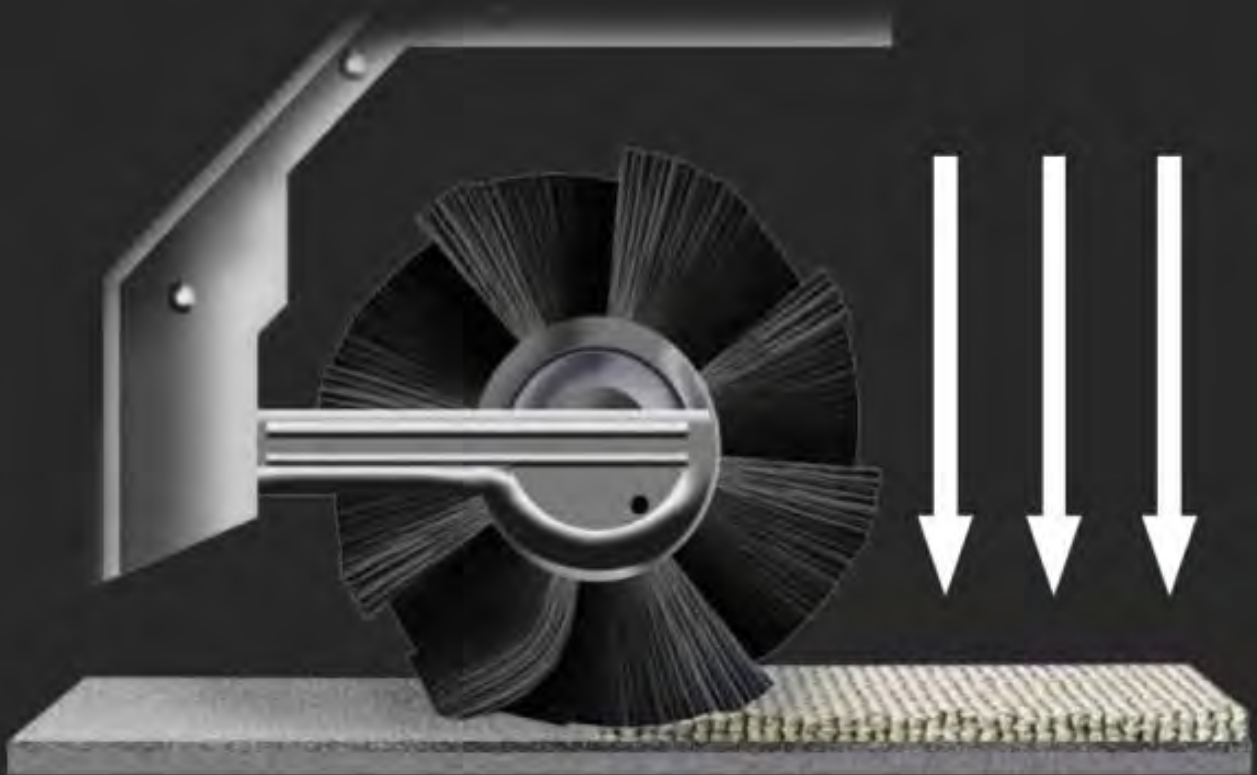

1404

.01 HIGH DUMP OF
DEBRIS



.03 LARGE HOPPER CAPACITY

.02 SELF-LEVELING
BRUSH

Other Features

- NDC (No Debris in Curve) Automatic brush movement while turning to eliminate debris passing between the side brush and the main brush
- Large sweeping path
- SLS (Self Leveling System) automatic brush pressure control
- Dust micro filtration
- Dust flap for large debris collection
- Pre-programmed working settings
- Adjustable side brush rpm
- Easy to use control panel
- Great working visibility
- Effective discharge system due to separate controls for hopper raise and tilting
- Automatic stop (by pedal release) in working mode
- Maximum distance from discharge point and operator
- Main brush replacement without tools

1404

		1404	1404 DUAL POWER
Max working width	in/ mm	58"/ 1450 mm	58"/ 1450 mm
Main brush width	in/ mm	32"/ 800 mm	32"/ 800 mm
Highest productivity	ft ² /h - m ² /h	82,290 ft ² / 7,644 m ²	82,290 ft ² / 7,644m ²
Dirt container volume	gal	40 gal/ 50 l	40 gal/ 150 l
Weight	lbs/ kg	1,025 lbs/ 465 kg	1,025 lbs/ 465 kg
Dimensions	inches	63 x 43 x 51	63 x 43 x 51
Power supply		24 (4x6)	Dual Power
Filtering surface	ft ² / m ²	65 ft ² / 6 m ²	65 ft ² / 6 m ²
Electric filter shaker		Automatic	Automatic
Max dumping height	Inches/ mm	56"/ 1430 mm	56"/ 1430 mm
Noise level	dB	63 dB	82 dB

AVAILABLE ACCESSORIES

6V325 AH BATTERY
6V325



12V210 AH BATTERY
12V210



6V225 AGM BATTERY
6V225-AGM



6V330 AGM BATTERY
6V330-AGM



CHARGER WET/GEL
BACA00136



BATTERY WATERING SYSTEM
CR-BWS-L-4



GET RIGHT SIZED

	Description	Continuous run-time	Theoretical ft ² / h	Maximum Theoretical ft ² /charge	Ft ² charge efficiency (70%)
TK1404E	6v 325ah Battery	4.5	82,290	370,304	259,213
TK1404E	6v 225 AGM Battery	2.0	82,290	164,580	115,206
TK1404E	6v 330 AGM Battery	4.7	82,290	386,762	270,733



IPC Eagle Corporation
3650 Dodd Road Eagan, MN 55123
800-486-2775
info@ipceagle.com